



RLT520-300MGE

- Green High Power Laser Diode
- 520 nm, 300 mW
- Multi transverse mode
- 5.6 mm TO-Can, Flat Window



Description

RLT520-300MGE is a green high power laser diode, typically emitting at 520 nm. It features multi transverse mode emission and operating temperature range of 0 to 60°C. It is an efficient radiation source for many applications like laser projection, holography, metrology, or use in the biomedical field. **RLT520-300MGE** comes in 5.6 mm TO-Can package **without PD**.

Maximum Rating*

Parameter	Symbol	Values		Unit
		Min.	Max.	
Reverse Voltage	V_R		2	V
Operating Temperature*	T_{OPR}	- 0	+ 60	°C
Storage Temperature*	T_{STG}	- 40	+ 85	°C
Soldering Temperature (max. 3s)	T_{SOL}		+ 260	°C



* operating close to or outside these conditions may damage the device

Electro-Optical Characteristics ($T_{CASE} = 25^\circ\text{C}$)

Parameter	Symbol	Values			Unit	
		Min.	Typ.	Max.		
Peak Wavelength	λ_P	510	520	530	nm	
Spectral Width	λ_Δ		2.0		nm	
Optical Output Power	P_O		300		mW	
Operating Voltage	V_F		5.5	6.5	V	
Threshold Current	I_{th}		120	400	mA	
Operating Current	I_F		520	800	mA	
Slope Efficiency	η		1.6		W/A	
Spatial Mode		Multi transverse mode				
Beam Divergence (FWHM)	parallel	$\Theta_{ }$	3	7	12	deg.
	perpendicular	Θ_{\perp}	16	22	30	deg.







Electrical Connection

Pin Configuration (subject to change without notice)

Pin #	Function
Pin 1	LD Anode
Pin 2	LD Cathode




Bottom View



Outline Dimensions

TO5

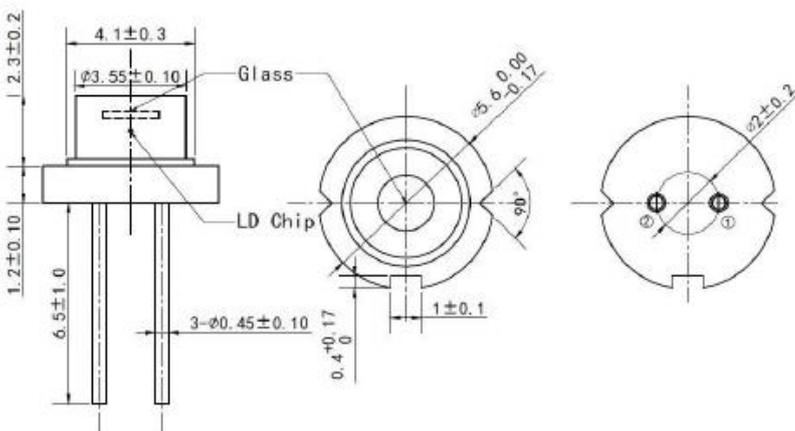

All dimensions in mm

Precautions

Safety

Caution: Laser light emitted from any laser diode may be **harmful to the human eye**. Avoid looking directly into the laser diode's aperture when the diode is in operation.

Note: The use of optical lenses with this laser diode will increase eye hazard

ESD caution

Always do handle laser diodes with extreme care to **prevent electrostatic discharge**, the primary cause of unexpected diode failure. To prevent ESD related failures, it is strongly advised to always **wearing wrist straps**, and **grounding all applicable work surfaces**, when handling laser diodes

Operating considerations

It is strongly advised to only operate this laser diode with a current source. The current of a laser diode is an exponential function of the voltage across it. **Usage of current regulated drive circuits is mandatory.** Laser diodes may be damaged by excessive drive currents or switching transients

Proper heat sinking will greatly enhance stability and lifetime of the laser diode