

ROITHNER LASERTECHNIK GIRDH

WIEDNER HAUPTSTRASSE 76 IO40 VIENNA AUSTRIA TEL. +43 I 586 52 43 -0, FAX. -44, OFFICE@ROITHNER-LASER.COM



APG2C1-450



High Power Single Chip LED

APG2C1-450 is a InGaN based, high power 450 nm single chip LED in standard emitter package for general application.

Specifications

Structure: InGaN

Peak Wavelength: 450 nm

Optical Output Power: typ. 430 mW

Life Time: > 10.000 hours

• Lead free product - RoHS compliant



Absolute Maximum Ratings (T_a=25°C)

Parameter	Symbol	Value	Unit
Power Dissipation, DC	P _D	1000	mW
Forward Current, DC	I _F	500	mA
Pulsed Current (1% duty cycle, 1kHz)	I _{FP}	1000	mA
Reverse Voltage	U _R	-5	V
Operating Temperature	T _{opr}	-30 +70	°C
Storage Temperature	T _{stg}	-30 +85	°C
Soldering Temperature (max. 1,5 s)	T _{sol}	330	°C

Electro-Optical Characteristics (T_a=25°C)

Parameter	Symbol	Condition	Min.	Тур.	Max.	Unit
Forward Current	I _F		-	350	-	mA
Viewing Angle	φ	$I_F = 350 \text{ mA}$	-	± 75	-	deg.
CW Output Power	Po	$I_F = 350 \text{ mA}$	-	430	-	mW
Peak Wavelength	λ_{P}	$I_F = 350 \text{ mA}$	-	450	-	nm
Forward Voltage	U_F	$I_F = 350 \text{ mA}$	-	3.1	-	V
Half Width (FWHM)	Δλ	$I_F = 350 \text{ mA}$	-	35	-	nm

Wavelength measurements tolerance is +/- 2% Output power measurement tolerance is +/- 10% Voltage measurement tolerance is +/- 2%

Device Materials

Item	Material
Foundation	Plastic
Lens	Silicone resin
Electrodes	AgCu
Heat Sink	AgCu






ROITHNER LASERTECHNIK GmbH

WIEDNER HAUPTSTRASSE 76





Outline Dimensions

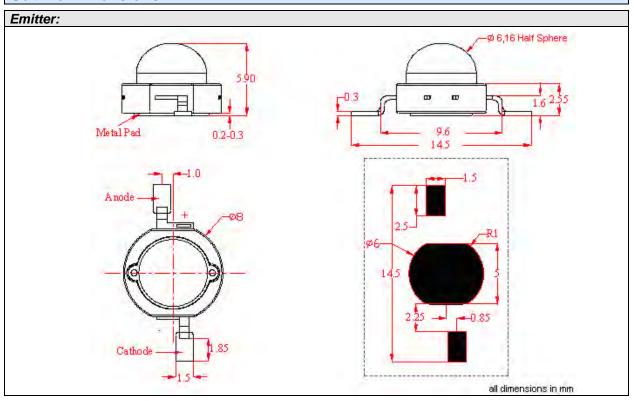




ROITHNER LASERTECHNIK GIRDH


1040 VIENNA TEL. +43 I 586 52 43 -0, FAX. -44, OFFICE@ROITHNER-LASER.COM



Radiation Pattern (lambertian lens without optics)

WIEDNER HAUPTSTRASSE 76





Accessories

Collimating optics, holders, reflectors

10158 + 10146, 2° half angle spot optic + optic holder

10048 + 10076, 4° half angle spot optic + optic holder

10003 + 10043, 6° half angle spot optic + optic holder

10003/15 + 10043, 15° half angle spot optic + optic holder

10003/25 + 10043, 25° half angle spot optic + optic holder

CLP17CR, 6° metalized polycarbonate reflector

CLP23CR, 20° metalized polycarbonate reflector



Static Electricity

LEDs are very sensitive to static Electricity and surge voltage. It is recommended to wear a wristband or an anti-electrostatic glove whenever handling the LEDs

All devices, equipment, and machinery that is used when handling the LEDs must be grounded properly.



Heat Generation

It is advised to operate these LEDs at a reasonable low temperature for long lifetime and stability. High operating temperature will result in premature degradation and shortened lifetime.





ROITHNER LASERTECHNIK GIRDH

WIEDNER HAUPTSTRASSE 76 IO40 VIENNA AUSTRIA TEL. +43 I 586 52 43 -0, FAX. -44, OFFICE@ROITHNER-LASER.COM



Soldering Conditions

Reflow Soldering:

APG2C1 LEDs have a maximum storage temperature of 85°. Therefor it is not possible to use a reflow soldering process for array assembly!

Hot Bar Soldering:

A Hot Bar Soldering process is recommended when soldering APG2C1 emitters. This process will only transfer heat to the leads and avoids overheating the emitter which will damage the device. In order to transfer sufficient heat from the hot bar to the device, following parameters must be carefully considered:

- Amount of flux
- Pressing force of solder tip
- Hot bar temperature

For the standard assembly process, following parameters should be maintained:

Hot Bar temperature: 330 °C
Force of Hot Bar. 40 N
Soldering time: 1.5 s


It is recommended to use a copper nickel-plated hot bar mounted to standard temperature controlled soldering equipment.

Manual Hand Soldering:

For prototype build or small series production runs, it is possible to place and solder the emitters by hand. It is therefore recommended to maintain the following parameters:

- Solder Tip Temperature 330 °C
- Soldering time. < 1.5 s
- Junction temperature must be kept below 70 °C

A visual inspection may be used to check the quality of the solder joint

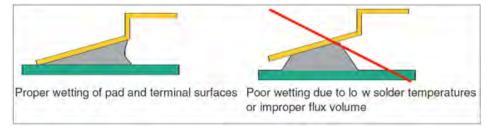

General Soldering Precautions:

- Mechanical stress, shock and vibration must be avoided during soldering
- Only use non corrosive flux.
- Do not apply current to the device until it has cooled down to room temperature after soldering.

