



RLT785-120MGS

- IR Laser Diode
- 785 nm, 120 mW
- Single Transverse Mode
- 5.6 mm TO Package, Flat Window



Description

RLT785-120MGS is an infrared laser diode, typically emitting at 785 nm. It features single mode emission and operating temperature range of up to 60°C. **RLT785-120MGS** comes in 5.6 mm TO-Can package with **integrated monitor PD**.

Maximum Rating*

| Parameter | Symbol | Values | | Unit |
|-----------------------------|-----------|--------|-------|------|
| | | Min. | Max. | |
| Reverse Voltage | V_R | | 2 | V |
| Operating Temperature* | T_{OPR} | - 20 | + 60 | °C |
| Storage Temperature* | T_{STG} | - 40 | + 85 | °C |
| Soldering Temperature (3 s) | T_{SOL} | | + 260 | °C |

* operating close to or outside these conditions may damage the device

Electro-Optical Characteristics ($T_{CASE} = 25^\circ\text{C}$)


| Parameter | Symbol | Values | | | Unit | |
|------------------------|------------------|------------------|------------|------------|-----------|------|
| | | Min. | Typ. | Max. | | |
| Peak Wavelength | λ_P | 775 | 785 | 800 | nm | |
| Spectral Width | λ_Δ | | 2.0 | | nm | |
| Optical Output Power | P_O | | 120 | | mW | |
| Operating Voltage | V_F | | 2.0 | 2.4 | V | |
| Threshold Current | I_{th} | | 35 | 65 | mA | |
| Operating Current | I_F | | 150 | 170 | mA | |
| Slope Efficiency | η | | 1.0 | | W/A | |
| Monitor Current | I_M | | 0.2 | | mA | |
| Beam Divergence (FWHM) | parallel | $\theta_{ }$ | 5 | 9 | 12 | deg. |
| | perpendicular | θ_{\perp} | 35 | 36 | 42 | deg. |




Electrical Connection

Pin Configuration

| Pin # | Function |
|-------|----------------------|
| Pin 1 | LD Cathode |
| Pin 2 | LD Anode, PD Cathode |
| Pin 3 | PD Anode |




Bottom View





Outline Dimensions

5.6 mm TO-Can

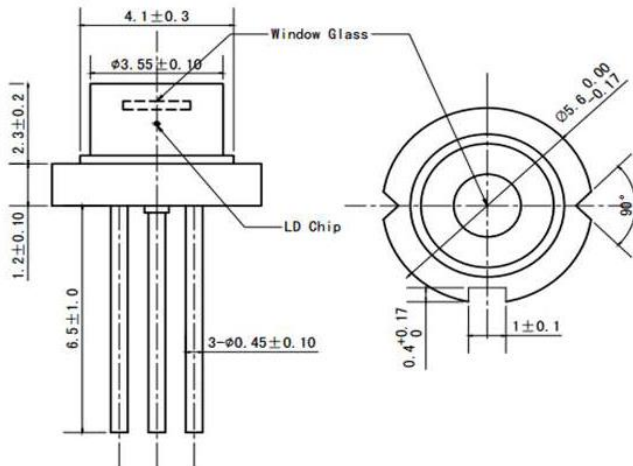

All dimensions in mm

Precautions

Safety

Caution: Laser light emitted from any laser diode may be **harmful to the human eye**. Avoid looking directly into the laser diode's aperture when the diode is in operation.

Note: The use of optical lenses with this laser diode will increase eye hazard

ESD caution

Always do handle laser diodes with extreme care to **prevent electrostatic discharge**, the primary cause of unexpected diode failure. To prevent ESD related failures, we do advise to always **wearing wrist straps**, and **grounding all applicable work surfaces**, when handling laser diodes

Operating considerations

We do advise to operate this laser diode with a current source only. The current of a laser diode is an exponential function of the voltage across it. **Usage of current regulated drive circuits is mandatory**. Laser diodes may be damaged by excessive drive currents or switching transients

Proper heat sinking will greatly enhance stability and lifetime of the laser diode

© All Rights Reserved

The above specifications are for reference purpose only and subjected to change without prior notice.