



## SPL1064-10-6-PD

- IR Pigtailed Laser Diode
- 1064 nm, 10 mW
- 6  $\mu\text{m}$  Single Mode Fiber
- FC/PC Connector
- Integrated Monitor PD



### Description

**SPL1064-10-6-PD** is an infrared pigtailed laser diode, typically emitting at 1064 nm with an output power of 10 mW and integrated monitor photodiode. It comes in a coaxial package with heat sink, and **6  $\mu\text{m}$  single mode fiber** with FC/PC connector. Variants without heat sink and different types of connectors are optionally available.

### Maximum Rating

Parameter	Symbol	Values		Unit
		Min.	Max.	
Reverse Voltage	$V_R$		2.0	V
PD Reverse Voltage	$V_{RP}$		30	V
Operating Temperature	$T_{OPR}$	- 10	+ 50	$^{\circ}\text{C}$
Storage Temperature	$T_{STG}$	- 40	+ 85	$^{\circ}\text{C}$
Soldering Temperature (max. 3s)	$T_{SOL}$		+ 260	$^{\circ}\text{C}$

### Electro-Optical Characteristics ( $T_{CASE} = 25^{\circ}\text{C}$ )

Parameter	Symbol	Values			Unit
		Min.	Typ.	Max.	
Peak Wavelength	$\lambda_P$	1050	1064	1079	nm
Output Power	$P_O$		10		mW
Spectral Width	$\Delta\lambda$		2.0		nm
Operating Voltage	$V_F$		1.7	2.5	V
Threshold Current	$I_{th}$		25	45	mA
Operating Current	$I_O$		90	110	mA
Monitor Current	$I_M$		0.2		mA
Fiber Spec.	Type	Single Mode			
	Core diameter	6			$\mu\text{m}$
	Connector	FC/PC*			
	Length	80			cm

\*SC / SMA905 available on request







## Electrical Connection

### Pin Configuration\*

Pin #	Function
Pin 1	LD cathode
Pin 2	LD anode, PD cathode
Pin 3	PD anode




### Bottom View



\* subject to change

## Outline Dimension

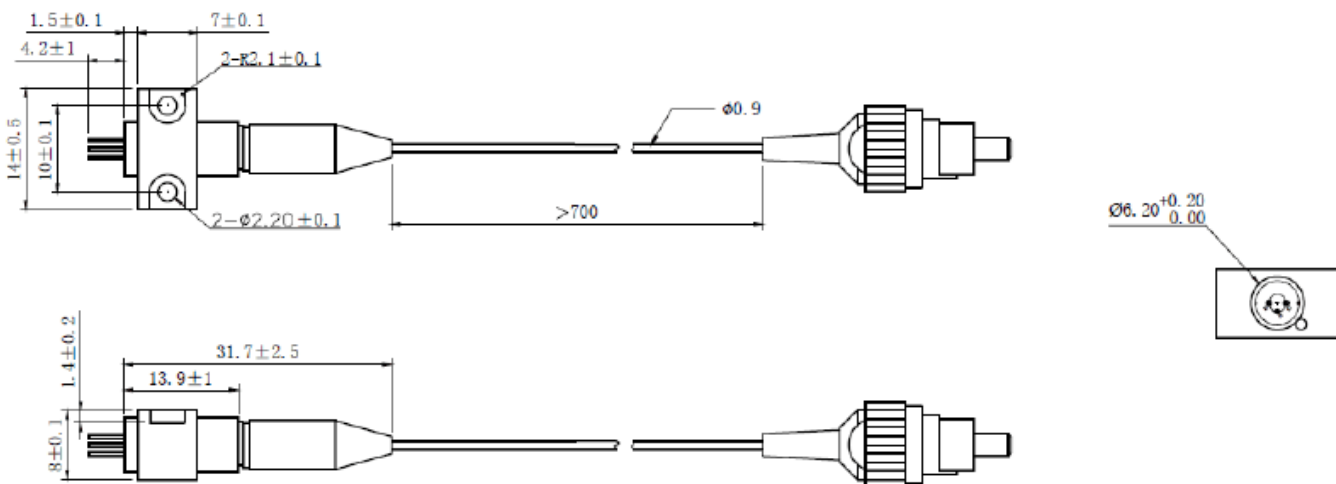

All dimensions in mm

## Precautions

### Safety

Laser light emitted from any laser diode may be harmful to the human eye. **Avoid looking directly into the laser diode's aperture.** The use of optical lenses will increase eye hazard



### ESD Caution

Always do handle laser diodes with care to **prevent electrostatic discharge.** We advise to **wearing wrist straps, and grounding all applicable work surfaces,** when handling laser diodes

### Operating Considerations

**Usage of current regulated drive circuits is mandatory** We advise to operate this laser diode with a current source and heat sink, and to never exceed the maximum specifications as outlined in this datasheet.

