



ROITHNER LASERTECHNIK GmbH

WIEDNER HAUPTSTRASSE 76
TEL. +43 1 586 52 43 -O. FAX. -44

1040 VIENNA AUSTRIA
OFFICE@ROITHNER-LASER.COM



SPM940-10W-105M-2P

- IR Pigtailed Laser Diode
- 940±10 nm, 10 W
- 105 µm Multi Mode Fiber
- FC/PC Connector
- 2-Pin Heat Load Package



Description



SPM940-10W-105M-2P is an infrared pigtailed laser diode, typically emitting at 940 nm with an output power of 10 W. It comes in a 2-pin heat load package, and **105 µm multi-mode fiber** with FC/PC connector. Different fibers and connectors as well as built-in PD and TEC are optionally available.

Maximum Rating

Parameter	Symbol	Values		Unit
		Min.	Max.	
Reverse Voltage	U_R		2.0	V
Operating Temperature	T_{OPR}	+ 10	+ 30	°C
Storage Temperature	T_{STG}	- 20	+ 80	°C
Soldering Temperature ($t_{max.}$ 3s)	T_{SOL}		+ 260	°C

Electro-Optical Characteristics ($T_{CASE} = 25^\circ\text{C}$)

Parameter	Symbol	Values			Unit
		Min.	Typ.	Max.	
Peak Wavelength	λ_P	930	940	950	nm
Spectral Width (FWHM)	$\Delta\lambda$		4.0		nm
Output Power	P_O		10		W
Operating Voltage	V_F		1.8	2.3	V
Threshold Current	I_{th}		0.5	1.0	A
Operating Current	I_O		11.5	12.5	A
Fiber Spec.	Type		Multi-mode		
	Core diameter		105*		µm
	Numerical Aperture (N.A.)		0.22		
	Connector		FC/PC*		
	Length		80		cm

* SC or SMA905 con., 200µm or 400 µm core diameter available on request







Electrical Connection

Pin Configuration*

Pin #	Function
Pin 1	LD Anode
Pin 2	LD Cathode




PIN Bottom View



* subject to change

Outline Dimension

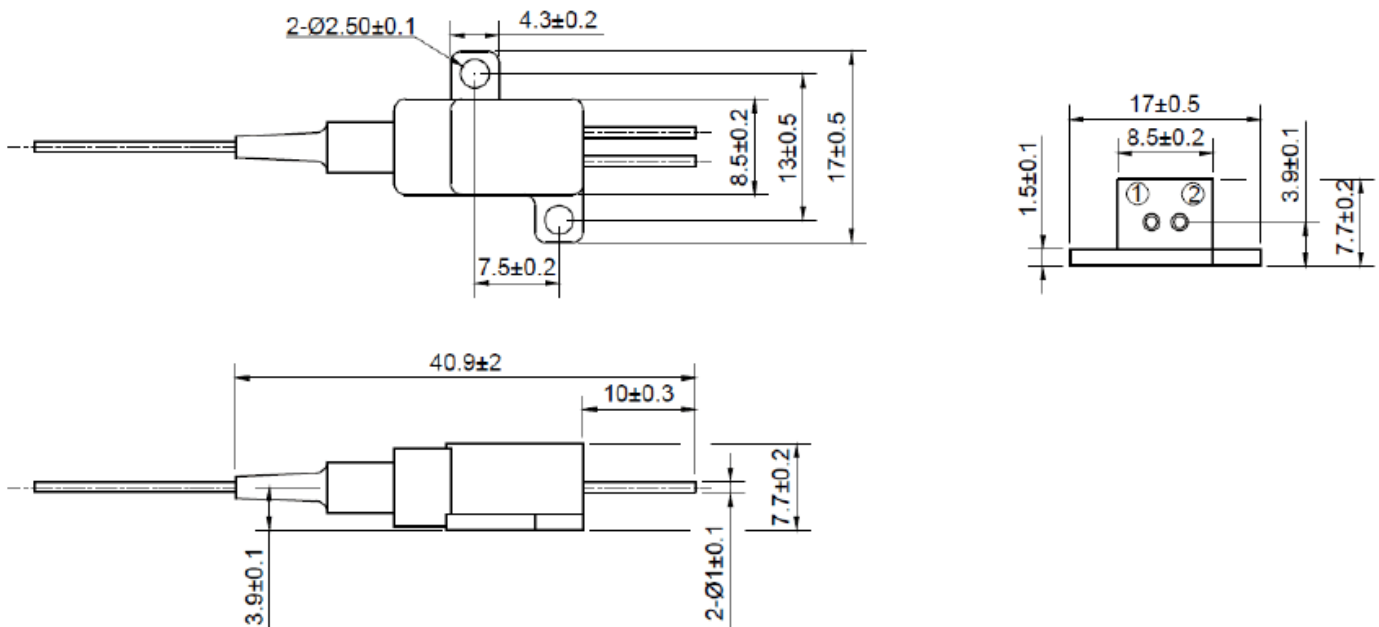

All dimensions in mm

Precautions

Safety

Laser light emitted from any laser diode may be harmful to the human eye. **Avoid looking directly into the laser diode's aperture.** The use of optical lenses will increase eye hazard



ESD Caution

Always do handle laser diodes with care to **prevent electrostatic discharge.** We advise to **wearing wrist straps, and grounding all applicable work surfaces,** when handling laser diodes

Operating Considerations

Usage of current regulated drive circuits is mandatory We advise to operate this laser diode with a current source and heat sink, and to never exceed the maximum specifications as outlined in this datasheet.

