

ROITHNER LASERTECHNIK

SCHOENBRUNNER STRASSE 7, 1040 VIENNA, AUSTRIA

TEL: +43 -1- 586 52 43-0 FAX: +43 -1- 586 52 43-44

office@roithner-laser.com www.roithner-laser.com

JET-655-10


TECHNICAL DATA

RED HIGH POWER LED

Wavelength: **typ. 655 nm**

Optical power: **typ. 20 mW at 300 mA**

Package: **M12 x 1 thread package**

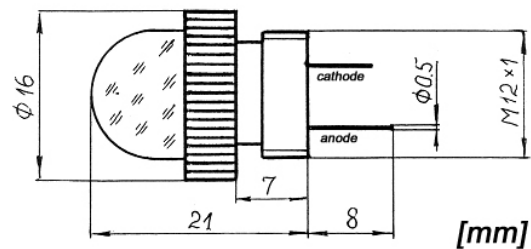

Absolute Maximum Ratings (T_c = 25°C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
DC Forward Current	I _F	350	mA
Pulse Forward Current *)	I _{FP}	5000	mA
Allowable Reverse Current	I _R	50	μA
Power Dissipation	P _D	750	mW
Operating Temperature	T _{OP}	-60 .. +75	°C
Storage Temperature	T _{STG}	-60 .. +95	°C

*) Pulse width ≤ 10 μs, duty cycle ≤ 0.1

Optical-Electrical Characteristics (T_c = 25°C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
DC Forward Voltage	V _F	I _F = 300 mA	2.4	2.5	2.6	V
DC Reverse Current	I _R	V _R = 5 V			50	μA
Optical Output Power	P _O	I _F = 300 mA	-	20	-	mW
Peak Wavelength	λ _P	I _F = 300 mA	650	655	660	nm
Spectrum Half Width FWHM	Δλ	I _F = 300 mA	-	25	-	nm
Viewing Angle FWHM	2θ _{1/2}	I _F = 300 mA		8	10	°
Rise Time	t _r	I _F = 300 mA		30		ns
Fall Time	t _f	I _F = 300 mA		40		ns
Thermal Resistance	R _T	-		30		K/W