

PRELIMINARY

LED385-66-60-110 Flat Lens Type UV Light Illuminator

LED385-66-60-110 is a wide viewing and extremely high output power illuminator assembled with a total of 60 high efficiency InGaN UV diode chips, mounted on a metal stem TO-66 and covered with Flat Glass Cap.


◆ Features

- 1) High reliability
- 2) Compact (TO-66) package
- 3) High output power at 385 nm

◆ Specifications

- 1) Product name UV Light Illuminator
- 2) Spec. No. LED385-66-60-110
- 3) Chip
 - (1) Material InGaN
 - (2) Peak wavelength 385 nm
- 4) Package
 - (1) Stem TO-66 stem
 - (2) Lens Flat Glass cap

◆ Outer dimension • Unit:mm •

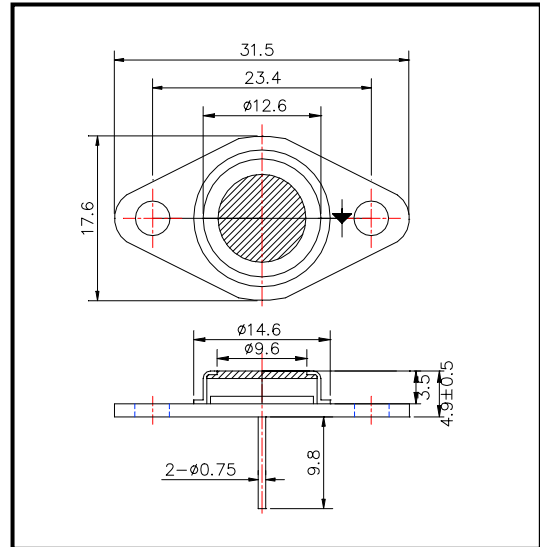

◆ Absolute Maximum Ratings

Item	Symbol	Maximum Rated Value	Unit	Ambient Temperature
Power Dissipation	P _D	5.0	W	T _a = 25 °C
Forward Current	I _F	300	mA	T _a = 25 °C
Pulse Forward Current	I _{FP}	-----	mA	T _a = 25 °C
Reverse Voltage	V _R	20	V	T _a = 25 °C
Operating Temperature	T _{OPR}	-30 ~ +80	°C	
Storage Temperature	T _{STG}	-30 ~ +100	°C	
Soldering Temperature	T _{SOL}	240	°C	

‡Pulse Forward Current condition: Duty = 1% and Pulse Width = 1 μs.

‡Soldering condition : Soldering condition must be completed within 3 seconds at 260 °C

◆ Electro-Optical Characteristics

Item	Symbol	Condition	Minimum	Typical	Maximum	Unit
Forward Voltage	V _F	I _F = 240 mA		17.0		V
Brightness	I _V	I _F = 240 mA		---		mcd
Total Radiated Power	P _O	I _F = 240 mA		150		mW
Radiant Intensity	I _E	I _F = 240 mA		---		mW/sr
Reverse Current	V _R	I _R = 10 μA	20			V
Peak Wavelength	λ _P	I _F = 240 mA	375	385	395	nm
Half Width	Δλ	I _F = 240 mA		17		nm
Viewing Half Angle	θ _{1/2}	I _F = 240 mA		±55		deg.

‡Heat sink is required thermal resistance <8K/W

ROITHNER LASERTECHNIK, A-1040 Vienna, Austria, Schoenbrunner Strasse 7
Tel.: +43-1-586 52 43 - 0, Fax.: +43-1-586 52 43 44
e-mail: office@roithner-laser.com, http://www.roithner-laser.com