

ROITHNER LASERTECHNIK

A-1040 WIEN, FLEISCHMANNGASSE 9

TEL: +43 -1- 586 52 43 FAX: +43 -1- 586 41 43

e-mail: office@roithner-laser.com http://www.roithner-laser.com





RLT370-10

TECHNICAL DATA



UV EMITTER

Pure UV-light output at typ. 370 nm
 No visible wavelengths
 Output power typ. 0.75 mW
 TO-46 package with flat black window
 Dimensions: \varnothing 5.6 mm x 7.8 mm

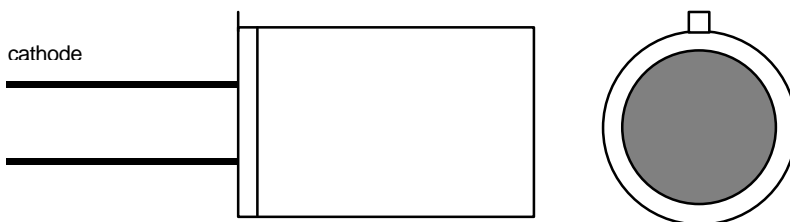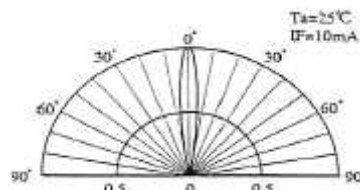

Absolute Maximum Ratings ($T_c=25^\circ\text{C}$)

CHARACTERISTIC	SYMBOL	RATING	UNIT
DC Forward Current	I_F	15	mA
Pulse Forward Current *)	I_{FP}	30	mA
Allowable Reverse Current	I_R	85	mA
Power Dissipation	P_D	60	mW
Operating Temperature	T_{OP}	-30 .. +80	°C
Storage Temperature	T_{STG}	-40 .. +100	°C

*) Pulse width \leq 10 ms, duty cycle \leq 0.1

Optical-Electrical Characteristics ($T_c = 25^\circ\text{C}$)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
DC Forward Voltage	V_F	$I_F = 10 \text{ mA}$	-	3.9	-	V
Optical Power	P_O	$I_F = 10 \text{ mA}$	-	750	-	μW
Peak Wavelength	λ_P	$I_F = 10 \text{ mA}$	-	370	-	nm
Spectrum Half Width	$\Delta\lambda$	$I_F = 10 \text{ mA}$	-	12	-	nm
Divergence	θ	$I_F = 10 \text{ mA}$		10		°

CAUTION

- The UV LED during operation radiates intense UV light.
- Do not look directly into the UV light during operation of device. This can be harmful to the eyes even for brief period due to the intense UV light.
- If viewing the UV light is necessary, please use UV filtered glasses to avoid damage by the UV light.
- If the UV LED in your product might be viewed directly, please affix a caution label to your product to that effect. Avoid direct eye exposure to UV light. Keep out of reach of children.