



ULTRA VIOLET LED Lamp


NS355L-3RLQ
 NS360L-3RLQ

(1) Absolute Maximum Ratings (Ta=25°C)

Item	Symbol	Maximum Rating	Unit
DC Forward Current	I_F	25	mA
Pulse Forward Current*	I_{FP}	100	mA
Reverse Current	I_R	85	mA
Power Dissipation	P_D	100	mW
Operating Temperature	T_{OPR}	-30 to +80	°C
Storage Temperature	T_{STG}	-30 to +85	°C
Soldering Temperature	T_{SOL}	260(within 10sec)	°C

* Conditions : Duty Cycle $\leq 1/10$, Pulse Width ≤ 0.1 msec

(3) Dimension (Unit : mm)

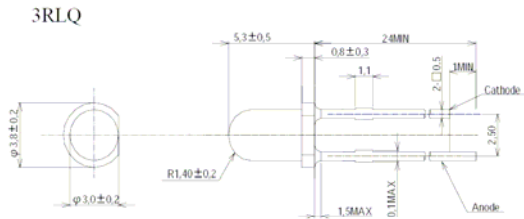

(2) Optical and Electrical Characteristics (Ta=25°C)

Item	Symbol	Condition	Min.	Typ.	Max.	Unit	
Forward Voltage	NS355L NS360L	V_F	$I_F=20$ mA	3.2	3.6	4.2	V
Peak Wavelength*1	NS355L	λ_p	$I_F=20$ mA	353	-	360	nm
	NS360L			360	-	363	
Full Width at Half Maximum	NS355L NS360L	$\Delta\lambda$	$I_F=20$ mA	10	-	20	nm
Optical Output Power *2		P_o	$I_F=20$ mA	Refer to Rank Information			mW

*1 Measurement error is ± 2 nm


*2 Measurement error is $\pm 10\%$

Rank Information

Rank	Optical Output Power			NS355L	NS360L
	Min.	Typ.	Max.	-3RLQ	-3RLQ
4	0.8	-	1.2	ask*3	
5	1.2	-	1.8		ask*3
6	1.8	-	2.4		
7	2.4	-	4.0		
8	4.0	-	6.0		
9	6.0	-	8.4		

*3 Please contact us for availability.

(4) Directive Characteristics (Ta=25°C)

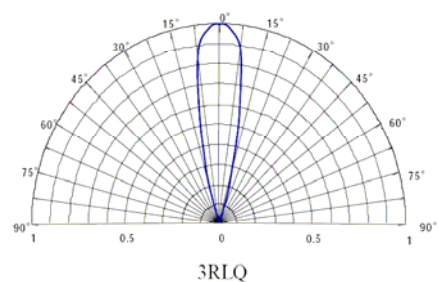

CAUTION

- LEDs emit very strong UV radiation.
- Don't look directly into the LED light. UV radiation can harm your eyes.
- To prevent even inadequate exposure, wear protective eyewear.
- If LEDs are embedded in devices, please indicate warning labels against the UV light LED used.
- Keep out of reach of children.

Specification and dimension are subject to change for improvement without notice.