



ROITHNER LASERTECHNIK GmbH

WIEDNER HAUPTSTRASSE 76
TEL. +43 1 586 52 43 -O. FAX. -44

1040 VIENNA

AUSTRIA

OFFICE@ROITHNER-LASER.COM



CW532-005F

- Green DPSS Laser Module
- 532 nm, <5 mW
- Focusable Acryl Lens
- Automatic Power Control
- 3 VDC Input Voltage
- IR Filter



Description

CW532-005F is a compact size focusable diode pumped solid state (**DPSS**) Nd:YVO₄+KTP laser module with a typical emission wavelength of **532 nm**, and an optical output power of **<5 mW**. It features automatic power control (**APC**) driving electronics for stable operation, an **IR filter** to block residue IR radiation, and is designed for 3 VDC supply voltage. **CW532-005F** comes equipped with a coaxial power connector. A matching **power supply, heat sink**, and suitable **laser module holder** is optionally available for quick setup and convenient operation (see page 3 for details).

Maximum Ratings (T_{CASE} = 25°C)

Parameter	Values		Unit
	Min.	Max.	
Operating temperature	+ 15	+ 30	°C
Storage temperature	- 20	+ 80	°C


Electro-Optical Characteristics (T_{CASE} = 25°C)

Parameter	Values			Unit
	Min.	Typ.	Max.	
Peak Wavelength	531	532	533	nm
Radiated Power			5	mW
Beam diameter at aperture		1.5		mm
Transverse mode	TEM ₀₀			
Warm up time		< 3		s
Operating Current		200		mA
Supply Voltage	2.2	3	3.2	VDC
Material body	brass			
Material lens	acryl			
Dimensions	Ø 13 x 37 (55)			mm
Connector	IEC 60130-10, Type A, 5.5/2.1 mm			
MTTF	3000			h





Outline Dimensions

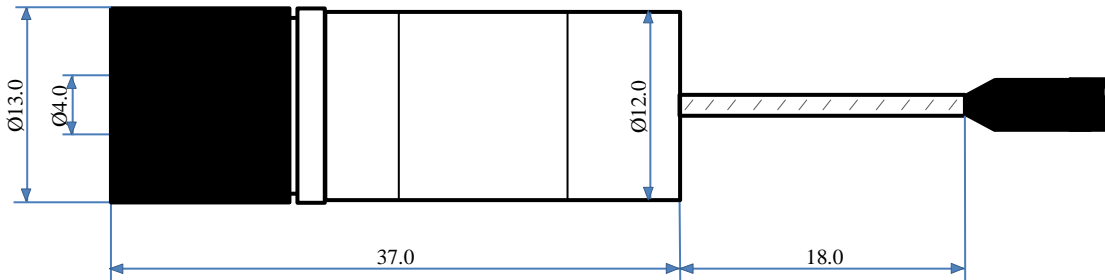

all dimensions in mm

Electrical Connection

(IEC 60130-10, Type A, 5.5/2.1 mm)



Precautions

Static Electricity:

Precautions against electrostatic discharge (ESD) must be taken when handling or operating the module. Surge voltage or electrostatic discharge can result in complete failure of the laser diode.

Heat Sinking:

In order to maintain lifetime and stability of the laser diode it is essential to provide efficient heat management. For long time stable operation proper contact between laser module and heat sink is mandatory.

Safety:

This laser module emits highly concentrated visible light which can be **hazardous to the human eye and skin**. It is classified as **CLASS 3R laser product** according to **IEC 60825-1** and **21 CFR Part 1040.10 Safety Standards**. Actual laser light emitted and precautions necessary strongly depend on mode of operation.



LASER RADIATION
AVOID DIRECT EYE EXPOSURE
CLASS 3R LASER PRODUCT



Accessories

Power Supply

LPS31C



- 100-240 VAC universal input voltage
- AC Europlug (CEE7/16)
- IEC 60130-10 Type A connector
- Output 3 VDC, max. 1 A
- CE certified
- 30 x 80 x 75 mm
- 80 g

Heat Sink

SQ50x34



- Aluminium, black anodized
- Clamping mechanism
- 50 x 50 x 34 mm
- 114 g
- Heat sink must be reworked to take on focusable module.

Holder

RLM-1650



- Steel, black anodized
- Height, reach, tilt adjustable
- Fixture 360° turnable
- Max. module diameter: 16.5 mm
- 69 x 67 mm
- 152 g