


LDP-50-HS			
Assembly Instruction			
Document: 10100932OM	Revision: 00	Date: 05.03.2024	Page 1/3

The Assembly Instruction for the Heat Sink Kit LDP-50-HS, is valid for the LDP-5023

Part list

- 1x heatsink with fan
- 1x thermal conductive foil
- 3x hexagonal screw Din 912 STV M3X6 mm


Required tools

- Screwdriver (hexagon socket 2,5 mm)
- Cutting blade
- Tweezers

Safety instructions


Please note the separate fan manufacturer's safety instructions: [sepa_anleit_dc_gb.pdf](#)


Revision	00				
Created		Approved		Released	Form
05.03.2024	SEn	05.03.2024	KS	05.03.2024	KS
Distribution:				File:	

LDP-50-HS			
Assembly Instruction			
Document: 10100932OM	Revision: 00	Date: 05.03.2024	Page 2/3

Assembly of heatsink kit

1. Make sure that all surfaces are clean and free from dust.
2. The thermal conductive material is covered by two protection foils. A smooth one and a perforated one.
Remove the smooth protection foil from thermal conductive material. Be careful to not scratch or harm the thermal conductive material.
3. Put thermal conductive material on Heatsink, avoid blister between heatsink and thermal conductive material. Flatten out thermal Material.
4. Remove the perforated protection foil from thermal conductive material.
5. Fix LDP-5023 on heatsink with M3x6 mm screws. Recommended torque: 0.6Nm.
6. Connect the Connector of heatsink Kit to the LDP-5023
The connector can be plugged only in one direction.

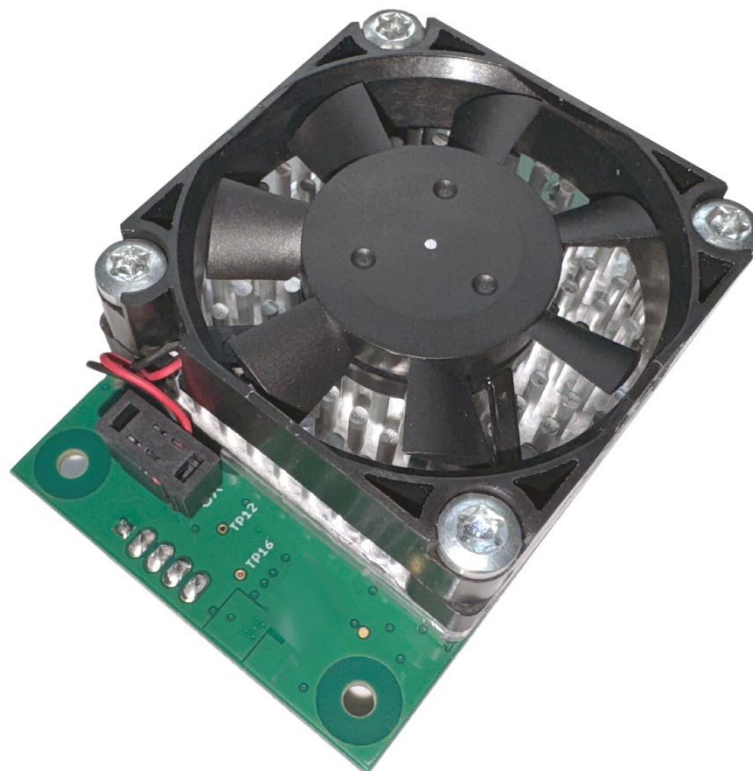

LDP-50-HS			
Assembly Instruction			
Document: 10100932OM	Revision: 00	Date: 05.03.2024	Page 3/3

Recomendation for assembly in customer Systems

Do not cover or block Fan of Heatsink Kit.

For proper air circulation at least 10 mm installation distance around the heatsink should be kept.

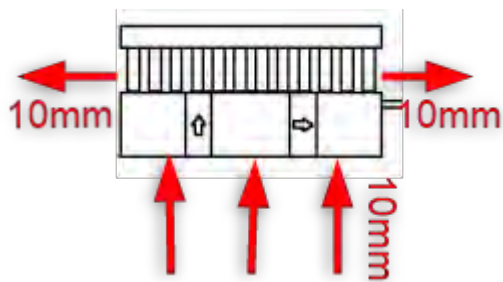


Figure 1: Recommended installation distances. Red arrows show airflow direction