



# ROITHNER LASERTECHNIK GmbH

WIEDNER HAUPTSTRASSE 76  
TEL. +43 1 586 52 43 -O. FAX. -44

1040 VIENNA

AUSTRIA

OFFICE@ROITHNER-LASER.COM



## RLT635-2W-GOP

- Red High Power Laser Diode
- 638 nm, 2.0 W
- Multi transverse mode
- TO5 package (9mm), Flat Window



### Description



**RLT635-2W-GOP** is a red high power laser diode, typically emitting at 638 nm. It features multi transverse mode emission and wide operating temperature of up to 50°C. It is an efficient radiation source for many applications like laser projection, holography, metrology, or use in the biomedical field. **RLT635-2W-GOP** comes in 9 mm TO-Can package **without PD**.

### Maximum Rating\*

Parameter	Symbol	Values		Unit
		Min.	Max.	
Reverse Voltage	$V_R$		2	V
Operating Temperature*	$T_{OPR}$	- 0	+ 50	°C
Storage Temperature*	$T_{STG}$	- 40	+ 85	°C
Soldering Temperature (max. 3s)	$T_{SOL}$		+ 260	°C

\* operating close to or outside these conditions may damage the device

### Electro-Optical Characteristics ( $T_{CASE} = 25^\circ\text{C}$ )

Parameter	Symbol	Values			Unit
		Min.	Typ.	Max.	
<b>Peak Wavelength</b>	$\lambda_P$	<b>628</b>	<b>638</b>	<b>648</b>	<b>nm</b>
Spectral Width	$\lambda_\Delta$		2.0		nm
Optical Output Power	$P_O$		2.0		W
Operating Voltage	$V_F$		2.5		V
Threshold Current	$I_{th}$		0.5		A
Operating Current	$I_F$		2.5		A
Slope Efficiency	$\eta$		1.2		W/A
Spatial Mode		Multi transverse mode			
Beam Divergence (FWHM)	parallel	$\Theta_{  }$	10		deg.
	perpendicular	$\Theta_{\perp}$	65		deg.







## Electrical Connection

### Pin Configuration (subject to change without notice)


### Bottom View

Pin #	Function
Pin 1	LD Anode
Pin 2	LD Cathode



## Outline Dimensions

### T05

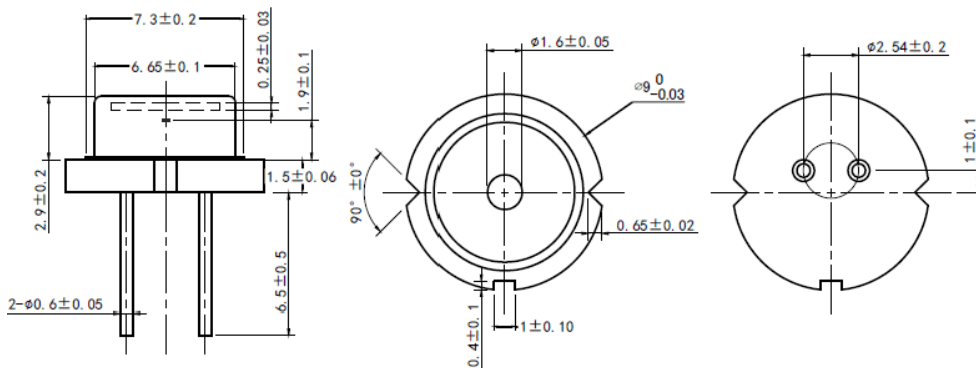

All dimensions in mm

## Precautions

### Safety

**Caution:** This laser diode emits highly concentrated light which can be **hazardous to the human eye and skin**. This diode is classified as **CLASS 4 laser product** according to **IEC 60825-1** and **21 CFR Part 1040.10 Safety Standards**.

**Note:** The use of optical lenses with this laser diode will increase eye hazard

### ESD caution

Always do handle laser diodes with extreme care to **prevent electrostatic discharge**, the primary cause of unexpected diode failure. To prevent ESD related failures, it is strongly advised to always **wearing wrist straps**, and **grounding all applicable work surfaces**, when handling laser diodes

### Operating considerations

It is strongly advised to only operate this laser diode with a current source. The current of a laser diode is an exponential function of the voltage across it. **Usage of current regulated drive circuits is mandatory**. Laser diodes may be damaged by excessive drive currents or switching transients

**Proper heat sinking will greatly enhance stability and lifetime of the laser diode**