



SPL940-30-PM-PD

- IR Pigtailed Laser Diode
- 940 nm, 30 mW
- 5 μm PM Fiber
- FC/APC connector
- Built-in PD
- Heat Sink



Description

SPL940-30-PM-PD is an infrared pigtailed laser diode, typically emitting at 940 nm with an output power of 30 mW. It comes in a coaxial package with integrated heat sink, **built-in monitor photodiode**, and **5 μm polarization maintaining fiber** with FC/APC connector. Variants without heat sink and different types of connectors are optionally available.

Maximum Ratings*

Parameter	Symbol	Values		Unit
		Min.	Max.	
Reverse Voltage	V_R		2.0	V
PD Reverse Voltage	V_{RPD}		30	V
Operating Temperature	T_{OPR}	- 10	+ 60	$^{\circ}\text{C}$
Storage Temperature	T_{STG}	- 40	+ 85	$^{\circ}\text{C}$
Soldering Temperature (t_{max} , 3s)	T_{SOL}		+ 260	$^{\circ}\text{C}$

* Operating close to or exceeding these parameters may damage the device

Electro-Optical Characteristics ($T_{CASE} = 25^{\circ}\text{C}$)


Parameter	Symbol	Values			Unit
		Min.	Typ.	Max.	
Peak Wavelength	λ_P	925	940	955	nm
Spectral Width	λ_{Δ}		/		nm
Output Power	P_O		30		mW
Operating Voltage	V_F		2.0	2.6	V
Threshold Current	I_{th}		25	45	mA
Operating Current	I_O		160	180	mA
PD Monitor Current	I_{PD}		0.3		mA
Fiber Spec.	Type	Polarization Maintaining			
	Pol. extinction ratio	13			
	Core diameter		5		μm
	N.A.		0.12		
	Connector		FC/PC		
	Length		80		cm




Electrical Connection

Pin Configuration*

Pin #	Function
Pin 1	LD cathode
Pin 2 [case]	LD anode, PD cathode
Pin 3	PD anode





Bottom View



* subject to change

Outline Dimension

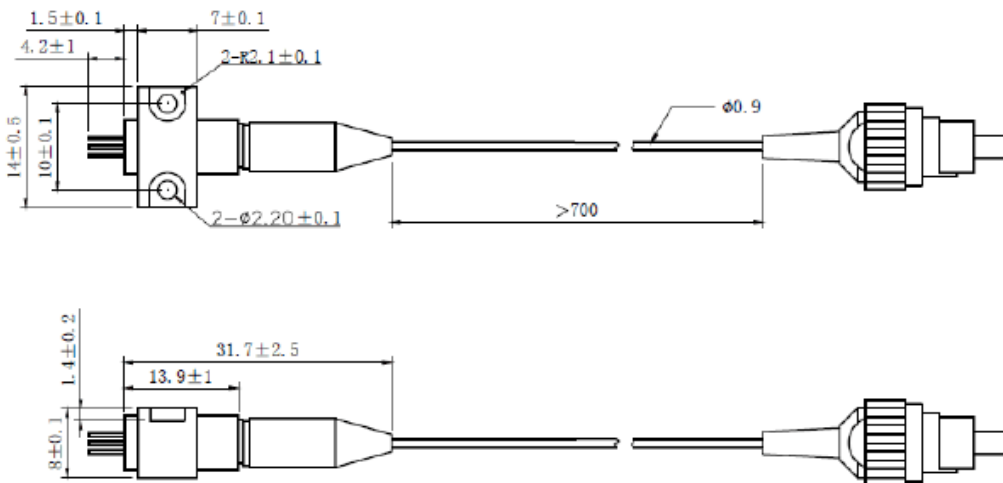

All dimensions in mm

Precautions

Safety

Laser light emitted from any laser diode may be harmful to the human eye. **Avoid looking directly into the laser diode's aperture.** The use of optical lenses will increase eye hazard



ESD Caution

Always do handle laser diodes with care to **prevent electrostatic discharge.** We advise to **wearing wrist straps, and grounding all applicable work surfaces,** when handling laser diodes

Operating Considerations

Usage of current regulated drive circuits is mandatory We advise to operate this laser diode with a current source and heat sink, and to never exceed the maximum specifications as outlined in this datasheet.

