

# ROITHNER LASERTECHNIK GIRDH

1040 VIENNA **WIEDNER HAUPTSTRASSE 76** TEL. +43 I 586 52 43 -0, FAX. -44, OFFICE@ROITHNER-LASER.COM





## **SMC770**

#### **TECHNICAL DATA**

## Visible LED, SMD

**AIGaAs** 

SMC770 is a AlGaAs LED mounted on a ceramic SMD package and sealed with silicone or epoxy resin for damp proof. On forward bias, it emits a radiation of typical 10 mW at a peak wavelength of 770 nm.

#### **Specifications**


Structure: AlGaAs

Peak Wavelength: typ. 770 nm Optical Output Power: typ. 10 mW


Package: Ceramic SMD, silicon/epoxy resin

#### Absolute Maximum Ratings ( $T_a=25$ °C)

Item	Symbol	Value	Unit
Power Dissipation	$P_D$	190	mW
Forward Current	l <sub>F</sub>	100	mΑ
Pulse Forward Current**	$I_{FP}$	500	mΑ
Reverse Voltage	$V_R$	5	<b>V</b>
Operating Temperature	$T_{opr}$	-20 +80	ပွ
Storage Temperature	T <sub>stq</sub>	-30 +80	ပွ
Soldering Temperature *	T <sub>sol</sub>	240	°C



<sup>\*\*</sup> max duty cycle 1%, max puls width 10µs

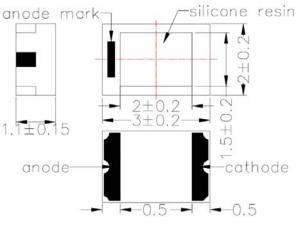

(Unit: mm)

### **Electro-Optical Characteristics**

Item	Symbol	Condition	Min.	Тур.	Max.	Unit
Forward Voltage	$V_{F}$	$I_F = 50 \text{ mA}$	-	1.75	1.95	V
Reverse Current	I <sub>R</sub>	$V_R = 5 V$	-	-	10	μA
Total Radiated Power*	Po	$I_F = 50 \text{ mA}$	5.0	10.0	-	mW
Radiation Intensity	I <sub>E</sub>	$I_F = 50 \text{ mA}$	2.0	5.0	-	mW/sr
Peak Wavelength	$\lambda_{P}$	$I_F = 50 \text{ mA}$	755	770	785	nm
Half Width	Δλ	$I_F = 50 \text{ mA}$	ı	30	-	nm
Viewing Half Angle	Θ <sub>1/2</sub>	$I_F = 50 \text{ mA}$	ı	±55	-	deg.
Rise Time	t <sub>R</sub>	$I_F = 50 \text{ mA}$		80		ns
Fall Time	t <sub>F</sub>	$I_F = 50 \text{ mA}$		80		ns

<sup>\*</sup> Total Radiated Power is measured by Photodyne #500

#### Notes


- Do not view directly into the emitting area of the LED during operation!
- The above specifications are for reference purpose only and subjected to change without prior notice.






#### **Soldering Conditions**

- DO NOT apply any stress to the lead particularly when heat.
- After soldering the LEDs should be protected from mechanical shock or vibration until the LEDs return to room temperature.
- When it is necessary to clamp the LEDs to prevent soldering failure, it is important to minimize the mechanical stress on the LEDs.

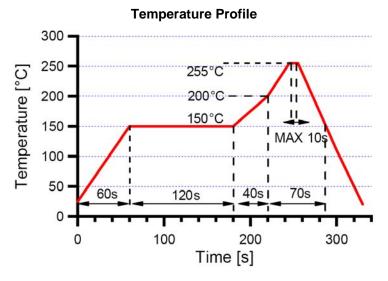

#### PCB Footprint Layout



(Unit: mm)

#### Static Electricity

- LEDs are very sensitive to Static Electricity and surge voltage. It is recommended to always wear a wrist band or an anti-electrostatic glove when handling the LEDs.
- All devices, equipment and machinery must be grounded properly. It is recommended that precautions should be taken against surge voltage to the equipment that mounts the LEDs.